MAYO
AVIATION

Proposal

ADS-B Avionics Upgrade Options

Beechcraft King Air C90 N35TV, S/N LJ-572

MAYOAVIATION.COM

September 19, 2017

NEXAIR Aviation, LLC
Mr. Wade Alexander
Mr. Larry Taylor
1107 W 6th Ave
Suite B
Cheyenne, Wyoming 82011

Aircraft Make:	Beechcraft
Aircraft Model:	C90
Aircraft Serial:	LJ-572
Registration No.:	N35TV
Quote No.:	2017-09-19.2

Dear Mr. Alexander and Mr. Taylor,

Thank you for considering Mayo Aviation for your aircraft service needs. We are pleased to present you with this proposal for the work specified on your aircraft. A summary of the requested work is below. Detailed information follows.

Item Description	Quoted Price
Installation of Garmin GTN 625 WAAS GPS and GTX-345R/335R Transponders for ADS-B In/Out	$30,300.00
Installation of Garmin GTN 725 WAAS GPS and GTX-345R/335R Transponders for ADS-B In/Out	$43,500.00

At Mayo Aviation, we strive to provide our customers with unequaled customer service and quality workmanship. All work performed by our technicians on your aircraft will meet or exceed the quality and safety standards established by the Federal Aviation Administration.

I appreciate that you are giving Mayo Aviation the opportunity to provide you with this proposal. I look forward to working with you in the near future. If you have any questions or concerns, please contact me at your convenience.

Warm Regards,

James Bohart

James Bohart
Avionics Manager
Mayo Aviation, Inc.
Mobile: 864-804-8411
Email: jamesb@mayoaviation.com

GARMIN GTN-625 OPTION PROPOSAL DETAILS

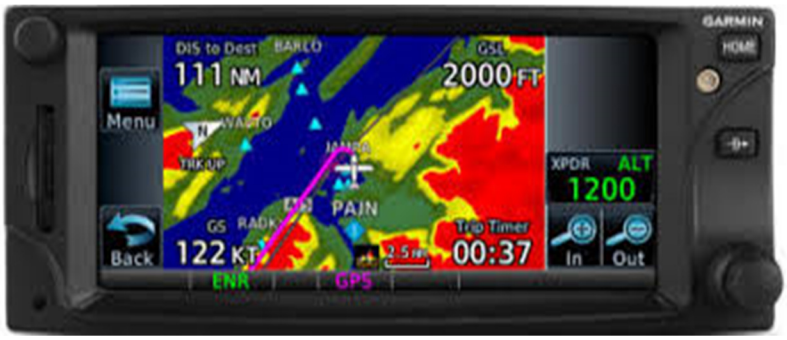

1. **Installation of Garmin GTN 625 WAAS GPS and Dual GTX-335R Transponders for ADS-B Out**

The installation will include the following:

- Remove Existing Garmin GPS-500.
- Remove the existing transponders.
- Install new GTN-625 touchscreen WAAS GPS with SD Database, Install Kit and Pilot Guide.
- Reuse the existing Garmin GPS/WAAS antenna
- Install 2 new Garmin GTX-335R Transponder
- Install a Used Bendix King KGP-560 TAWS unit
- Trade-In for removed GNS-500WT ($3,500.00)
- Installation Materials
- Installation Labor
- Engineering Charges
- Garmin Beechcraft King Air C90 STC Certification

The installation will consist of removing the existing Garmin GPS-500 GPS and both transponders systems and installing a GTN-625 system interfaced to the autopilot and flight director, two new remote mounted GTX-335R transponders for ADS-B Out.

A used Bendix King KGP-560 TAWs unit will be installed and displayed on the existing Bendix King KMD-540 MFD for TAWS display.

This installation will retain the both existing NAV and Com systems, audio system, ADF and the DME. The existing Bendix King MFD will remain to display the current Radar.

Total Engineering, Labor and Materials.	**$30,300.00**	Accept ☐	Declined ☐
Optional GTX-345R Transponder for ADS-B OUT.	**$1,800.00**	Accept ☐	Declined ☐

GARMIN GTN-725 OPTION PROPOSAL DETAILS

2. Installation of Garmin GTN 725 WAAS GPS and GTX-345R/335R Transponders for ADS-B In/Out

The installation will include the following:

- Remove Existing Garmin GPS-500.
- Remove the existing transponders.
- Install new GTN-725 touchscreen WAAS GPS with SD Database, Install Kit and Pilot Guide.
- Reuse the existing Garmin GPS/WAAS antenna
- Install Two new Garmin GTX-335R Transponder
- Install TAWS Enablement option
- Install Third party radar Enablement option
- Trade-In for removed GNS-500WT ($5,500.00)
- Installation Materials
- Installation Labor
- Engineering Charges
- Garmin Beechcraft King Air C90 STC Certification

The installation will consist of removing the existing Garmin GPS-500WT GPS and both transponders systems and installing a GTN-725 system interfaced to the autopilot and flight director, two new remote mounted GTX-335R/345R transponders for ADS-B IN and Out. The existing radar will be displayed on the GTN-725 and the internal TAWS will be enabled.

This installation will retain the both existing NAV and Com systems, audio system, ADF and the DME.

Total Engineering, Labor and Materials.	**$43,500.00**	Accept ☐	Declined ☐
Pilot request of installing a GTN-750 NAV/COM/WAAS GPS in place of the GTN-725 for replacement of the #1 Nav and Com systems.	**$54,500.00**	Accept ☐	Declined ☐

Note: The original Avionics and any modification wiring diagrams are required to complete the proposed upgrade. If the original aircrafts Avionics wiring diagrams are not available replacements from Beechcraft will be ordered and will be an additional expense to the customer estimated at $300.00.

PROJECT INFORMATION

DOWN-TIME

Estimated downtime is estimated at 10 to 15 days. All downtime estimates assume adequate lead-time is provided. Downtime is dependent upon the customer's compliance with the lead-time requirements specified above and delivery of the aircraft/components by the agreed upon time on the induction date.

Aircraft/component logbooks must accompany aircraft at time of induction. Additional down time may be required for changes to the scope of work, or other unforeseen circumstances and is not guaranteed or warranted in any form. Mayo Aviation is not responsible for delays incurred as a result of forces beyond our reasonable control, including, but not limited to vendor delays, failure of transportation, delays in the attainment of FAA approvals, etc.

LEAD-TIME

Adequate lead-time is a critical component to the ability to meet the estimated delivery time, as vendor delivery requirements are outside Mayo Aviation's control and must be provided for. Lead-time required for this project is subject to our confirmation of space, time required for equipment procurement and manpower availability.

PRICING

Pricing is as described in the work scope. Prices stated herein are based on U.S. dollars and are exclusive of Federal, State and local taxes, airport fees and applicable freight charges and are valid for a period of thirty (30) days. Parts prices included in this proposal are subject to change without notice. Mayo Aviation reserves the right to pass pricing increases through to the customers, which are necessitated by state or federal governmental regulatory changes, if applicable. All removed equipment becomes the property of Mayo Aviation.

The quoted prices do not include clearing discrepancies, Service Bulletins, or Airworthiness directives. Discrepancies will be reviewed with the customer's authorized representative for approval prior to corrective action. Any discrepancies, Service Bulletins, or Airworthiness Directives requiring action will be handled on a time and materials basis at the prevailing shop rates.

PERFORMANCE OF WORK SCOPE

A Maintenance and/or Repair Authorization form will be provided upon acceptance of this quote for your convenience. The work scope will be added, and room will be reserved for any discrepancies requiring attention. Mayo Aviation must receive the signed authorization form no later than aircraft induction.

All estimates are based on completion in accordance with FAA standards. In the event the company standards exceed those required by the FAA, Mayo Aviation reserves the right to adjust the pricing provided in this document. Should the Customer request additions, and/or changes to the Work scope, they will be handled on a time and materials basis.

ADDITIONAL INFORMATION

The FAA has varying interpretations of Continuing Airworthiness requirements. This proposal was prepared based on our understanding of the current requirements. However, in the event Continuing Airworthiness documentation is required as a result of a different interpretation, it will be considered additional and addressed on a time and material basis. Appropriate engineering and DER charges could apply.

This quote assumes that space is available for the new installations and other equipment unless otherwise specifically stated in the work scope. It also assumes adequate electrical interfaces and power exist in the aircraft for the proposed installation and that the work scope can be accomplished without any structural modifications. Should relocation or other modification be required, it will be considered additional and addressed on a time and material basis and appropriate DER charges will apply.

TERMS AND CONDITIONS

The work scope covered by this quotation is subject to Mayo Aviation's standard terms and conditions. Please see Mayo Aviation's work authorization document for the applicable terms and Conditions.

PAYMENT TERMS

Mayo Aviation agrees to accept two payments for the above work scope. The first payment will be equal to 50% of the proposal amount and will be due at the time of proposal acceptance. The final payment will be equal to the account balance and is due upon aircraft delivery.

Overhaul exchange pricing assumes the return of your units to the appropriate overhaul facility, which Mayo Aviation will take care of. Charges assessed by these vendors to bring cores up to their exchange criteria will be invoiced additionally as applicable.

Any warranties provided by Mayo are contingent upon payment in full according to Mayo Aviation' established credit terms for services rendered.

CUSTOMER ACCEPTANCE

The customer hereby agrees to the proposal presented herein and authorizes the above work scope. The customer represents that he or she is employed by the customer in the capacity indicated and is unequivocally authorized to bind the customer to this agreement.

Mayo Aviation hereby agrees to perform the work specified in this agreement. The parties agree that at the time of the execution hereof, there are no agreements, understandings, conditions, warranties, guarantees or, representations, oral or written, express or implied, with respect to the subject matter of Mayo Aviation's terms and conditions that are not hereby merged or superseded.

_____ _____

Accepted Date

Mr. Wade Alexander

Mr. Larry Taylor

NEXAIR Aviation, LLC.

Beechcraft C90, N35TV