MAYO
AVIATION

Proposal

Installation of Garmin GTN 750 NAV/COMM/WAAS GPS/MFD with a GMA-35A Remote Audio Panel, Garmin GNC-255A NAV/COMM and GTX-345R/335R Transponders for ADS-B In/Out, Garmin GWX-70 radar and a Garmin Flightstream 510

Talahone, LLC.
Beechcraft King Air C90-A N593SM, LJ-1106
Quote # 2017-07-17

MAYOAVIATION.COM

April 6, 2017

Talahone, LLC.
Mr. Robert Jacobs
P.O. Box 1335
Pampa, TX 79066

Aircraft Make:	Beechcraft
Aircraft Model:	C90-A
Aircraft Serial:	LJ-1106
Registration No.:	N640RJ
Quote No.:	2017-07-17

Dear Robert,

Thank you for considering Mayo Aviation for your aircraft service needs. We are pleased to present you with this proposal for the work specified on your aircraft. A summary of the requested work is below. Detailed information follows.

Item Description	Quoted Price
Installation of Garmin GTN 750 NAV/COMM/WAAS GPS/MFD with a GAD-42 Adapter, GMA-35C Remote Audio Panel, Garmin GTX-345/335 Transponders for ADS-B In/Out and a Garmin Flightstream 510.	$65,800.00
Installation of a Garmin G600 Pilots Primary Flight Display System (left Side) with Digital Attitude/Heading System, Digital Air Data Computer and a GAD-43E adapter	$67,600.00
Option: Installation of a Garmin GWX-70 Weather Radar	$27,000.00
Option: Installation of Garmin GDL-69A XM weather and Audio receiver.	$8,800.00
Option: Installation of Garmin Flight Stream 510.	$1,350.00
Option: Installation of Garmin Chartview option.	$1,750.00
Discount for multiple items selected.	-$3,000.00

At Mayo Aviation, we strive to provide our customers with unequaled customer service and quality workmanship. All work performed by our technicians on your aircraft will meet or exceed the quality and safety standards established by the Federal Aviation Administration.

I appreciate that you are giving Mayo Aviation the opportunity to provide you with this proposal. I look forward to working with you in the near future. If you have any questions or concerns, please contact me at your convenience.

Warm Regards,

James Bohart

James Bohart
Avionics Manager
Mayo Aviation, Inc.
Mobile: 864-804-8411
Email: jamesb@mayoaviation.com

PROPOSAL DETAILS

1. **Installation of Garmin GTN 750 NAV/COMM/WAAS GPS/MFD with a GMA-35A Remote Audio Panel, Garmin GNC-225A NAV/COMM, GTX-345R/335R Transponders for ADS-B In/Out.**

   The installation will include the following:

   - Remove existing both NAV's and COMM's, ADF, GPS and Audio systems
   - Install new Garmin GTN-750 touchscreen Nav/Comm/WAAS GPS/MFD with Americas Database
   - Install Garmin GAD-42 Adapter
   - Install new Garmin GNC-255A Nav/Comm
   - Install new Garmin GMA-35A Remote Audio Panel
   - Install new Garmin GTX-345R ADS-B In/Out Transponder
   - Install new Garmin GTX-335R ADS-B Out Transponder
   - Installation Materials
   - Installation Labor
   - Engineering Charges
   - Beechcraft C90 STC Certification

Total Engineering, Labor and Materials.	**$65,800.00**	Accept ☐	Declined ☐
Discount if items 1, 2 and 3 are chosen.	**-$3,000.00**	Accept ☐	Declined ☐

The installation will consist of removing the existing center radio panel including both Nav's, both Com's, both transponders, the ADF, the existing aircraft audio system and the KLN-94 GPS, fabricating a new center radio panel for the proposed Garmin GTN-750 WAAS GPS/NAV/COM with a GMA-35 remote integrated Audio System, interfaced to the autopilot and flight director (the GTN-750), two new remote mounted GTX-335R/345R transponders for ADS-B IN and Out.

2. Installation of Garmin G600 Pilots Primary Flight Display with Digital Attitude and Heading system and Digital Air Data Computer

The installation will include the following:

- Remove existing Pilots flight instrumentation
- Install one Garmin GDU-620 Left Hand Primary Flight Display
- Install one Garmin GRS-77 Digital Attitude & Heading Reference System
- Install one Garmin GDC-74A Digital Air Data System
- Install one Garmin GAD-43E Gyro Adapter
- Install one new Garmin GMU-44 Magnetometer
- Install one Garmin GTP-59 OAT Probe
- Install one Mid-Continent MD-302 Standby Flight Instrument
- Installation Materials
- Installation Labor
- Engineering Charges
- Garmin King Air STC Certification

Total Engineering, Labor and Materials. . . . . $67,600.00 Accept ☐ Declined ☐

The installation will consist of removing the existing aircrafts pilots flight instruments to include the airspeed indicator, altimeter and vertical speed indicator and install a Garmin G600 Primary Flight Display integrated to the proposed Garmin GTN-750 and the existing autopilot system the G600 will have the ability to display overlay Weather Radar, XM Weather and Charts along with 3D synthetic Vision display. A Mid-Contintent MD-302 Stand By indicator will be installed as a backup instrument for the removed airspeed, altimeter and VSI indicators.

The Mid-Continent MD-302 (SAM) is a solid-state instrument that displays attitude, altitude, airspeed, slip, vertical trend, and heading information to the pilot in an advanced, 2-inch format.

Bringing true “glass cockpit” capabilities to the aircraft you already have, Garmin’s G600 is a retrofit breakthrough. Now, you can upgrade your avionics panel with a G600 suite and start reaping the benefits of enhanced situational awareness, safety and pilot workload reduction. The dual-screen G600 works with your Garmin avionics stack, pairing both a primary flight display (PFD) and a multi-function (MFD) display in a single 10-inch wide bezel – to provide a fully certified upgrade option for your cockpit. And with software assurance levels required for FAR Part 23 Class 3 aircraft, G600 is the ideal solution.

SAM delivers an easy-to-fit, compact design with selectable orientation (horizontal and vertical) like no other, ensuring a perfect fit within any panel. The unique two-screen display features high-definition graphics and extra-wide viewing angles. And at 1.6 pounds, SAM weighs less than the three instruments it’s designed to replace.

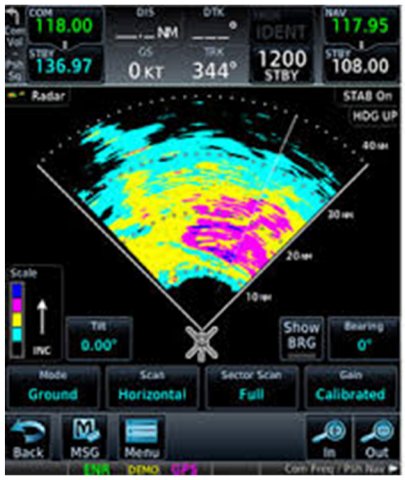

3. OPTION--Installation of Garmin GWX-70 Weather Radar

The installation will include the following:

- Remove existing Radar system
- Install one Garmin GWX-70 Radar RT
- Installation Materials
- Installation Labor
- Engineering Charges
- Garmin King Air STC Certification

Total Engineering, Labor and Materials. . . . . $27,000.00 Accept ☐ Declined ☐

The installation will consist of removing the existing aircraft radar RT and Indicator and displaying the proposed new Garmin GWX-70 Weather Radar on the proposed GTN-750 and the G600 primary Flight Display.

The GWX-70 is a technologically advanced weather radar that collects real-time precipitation intensity to provide the pilot with the tactical weather information needed to help avoid severe weather. The GWX 70's compact, all-in-one antenna/receiver/transmitter is designed for easy installation in a wide variety of aircraft.

With the addition of **Ground Mapping Mode**, the GWX 70 provides a real-time depiction of terrain for various applications - such as an additional navigational aid.

On compatible displays, **Altitude Compensated Tilt** will also reduce the pilot's workload. One of the challenges with older radars is the need for the pilot to change the tilt of the radar with any altitude change. This process is automated in the GWX 70 such that the pilot needs to set the tilt only once and the radar automatically adjusts with any future altitude changes.

Garmin's exclusive WATCH™ feature (Weather Attenuated Color Highlight) helps identify the shadowing effects of short-range cell activity, highlighting areas where radar signals are weakened, or attenuated, by intense precipitation and that may not fully reflect the "storm behind the storm." To focus radar scanning on a specific area of interest, the GWX 70 offers pilot-adjustable sector scan angles from 20 to 120 degrees. The system also includes a vertical scanning function to aid in analyzing storm tops, gradients and cell buildup activity at various altitudes.

4. OPTION--Installation of Garmin GDL-69A XM Weather/Audio receiver

The installation will include the following:

- Install one Garmin GDL-69A XM Weather/Audio Receiver
- Installation Materials
- Installation Labor
- Engineering Charges
- Garmin King Air STC Certification

Total Engineering, Labor and Materials. . . . . $8,800.00 Accept ☐ Declined ☐

5. OPTION--Installation of Garmin Flight Stream 510

The installation will include the following:

- Install one Garmin Flight Stream 510
- Installation Labor
- Garmin King Air STC Certification

Total Engineering, Labor and Materials. . . . . $1,350.00 Accept ☐ Declined ☐

6. OPTION--Installation of Garmin Chartview

The installation will include the following:

- Install one Garmin Chartview Enablement
- Installation Labor
- Garmin King Air STC Certification

Total Engineering, Labor and Materials. . . . . $1,350.00 Accept ☐ Declined ☐

Note 1: The above estimates have been provided with the completion of an aircraft equipment survey. However additional equipment and materials may be required to complete these installations based on the actual aircraft configuration. Avionics wiring diagrams are a necessity of any upgrades and must be provided before the aircraft induction.

Note 2: Colorado State does not charge sales tax on parts for aviation.

PROJECT INFORMATION

DOWN-TIME

Estimated downtime is **21 -28 total days**. All downtime estimates assume adequate lead-time is provided. Downtime is dependent upon the customer's compliance with the lead-time requirements specified above and delivery of the aircraft/components by the agreed upon time on the induction date.

Aircraft/component logbooks including the original avionics wiring diagrams and any wiring diagrams for modifications made to the aircraft must accompany aircraft at time of induction. Additional down time may be required for changes to the scope of work, or other unforeseen circumstances and is not guaranteed or warranted in any form. Mayo Aviation is not responsible for delays incurred as a result of forces beyond our reasonable control, including, but not limited to vendor delays, failure of transportation, delays in the attainment of FAA approvals, etc.

LEAD-TIME

Adequate lead-time is a critical component to the ability to meet the estimated delivery time, as vendor delivery requirements are outside Mayo Aviation's control and must be provided for. Lead-time required for this project is subject to our confirmation of space, time required for equipment procurement and manpower availability.

PRICING

Pricing is as described in the work scope. Prices stated herein are based on U.S. dollars and are exclusive of Federal, State and local taxes, airport fees and applicable freight charges and are valid for a period of thirty (30) days. Parts prices included in this proposal are subject to change without notice. Mayo Aviation reserves the right to pass pricing increases through to the customers, which are necessitated by state or federal governmental regulatory changes, if applicable.

All removed equipment becomes the property of Mayo Aviation.

The quoted prices do not include clearing discrepancies, Service Bulletins, or Airworthiness directives. Discrepancies will be reviewed with the customer's authorized representative for approval prior to corrective action. Any discrepancies, Service Bulletins, or Airworthiness Directives requiring action will be handled on a time and materials basis at the prevailing shop rates.

PERFORMANCE OF WORK SCOPE

A Maintenance and/or Repair Authorization form will be provided upon acceptance of this quote for your convenience. The work scope will be added, and room will be reserved for any discrepancies requiring attention. Mayo Aviation must receive the signed authorization form no later than aircraft induction.

All estimates are based on completion in accordance with FAA standards. In the event the company standards exceed those required by the FAA, Mayo Aviation reserves the right to adjust the pricing provided in this document. Should the Customer request additions, and/or changes to the Work scope, they will be handled on a time and materials basis.

ADDITIONAL INFORMATION

The FAA has varying interpretations of Continuing Airworthiness requirements. This proposal was prepared based on our understanding of the current requirements. However, in the event Continuing Airworthiness documentation is required as a result of a different interpretation, it will be considered additional and addressed on a time and material basis. Appropriate engineering and DER charges could apply.

This quote assumes that space is available for the new installations and other equipment unless otherwise specifically stated in the work scope. It also assumes adequate electrical interfaces and power exist in the aircraft for the proposed installation and that the work scope can be accomplished without any structural modifications. Should relocation or other modification be required, it will be considered additional and addressed on a time and material basis and appropriate DER charges will apply.

TERMS AND CONDITIONS

The work scope covered by this quotation is subject to Mayo Aviation's standard terms and conditions. Please see Mayo Aviation's work authorization document for the applicable terms and Conditions.

PAYMENT TERMS

Mayo Aviation agrees to accept two payments for the above work scope. The first payment will be equal to 50% of the proposal amount and will be due at the time of proposal acceptance. The final payment will be equal to the account balance and is due upon aircraft delivery.

Overhaul exchange pricing assumes the return of your units to the appropriate overhaul facility, which Mayo Aviation will take care of. Charges assessed by these vendors to bring cores up to their exchange criteria will be invoiced additionally as applicable.

Any warranties provided by Mayo are contingent upon payment in full according to Mayo Aviation' established credit terms for services rendered.

CUSTOMER ACCEPTANCE

The customer hereby agrees to the proposal presented herein and authorizes the above work scope. The customer represents that he or she is employed by the customer in the capacity indicated and is unequivocally authorized to bind the customer to this agreement.

Mayo Aviation hereby agrees to perform the work specified in this agreement. The parties agree that at the time of the execution hereof, there are no agreements, understandings, conditions, warranties, guarantees or, representations, oral or written, express or implied, with respect to the subject matter of Mayo Aviation's terms and conditions that are not hereby merged or superseded.

_____ _____

Accepted Date

Mr. Robert Jacobs

Talahone LLC.